

# HIRIDE Hopper

High-Speed, Rapid-Induction, Dynamic Eductor



## FEATURES

- Rapid, complete mixing of dry or liquid additives into the fluid system
- Lowest comparable pressure loss
- Creates high shear rates in a circulating loop
- Compact design with small footprint
- Dust-free dry-product mixing

## BENEFITS

- Minimizes “fish eyes” in hard-to-mix products
- Requires less energy
- Flexible design eliminates extra equipment
- Ideal for rigs where space is at a premium
- A greater degree of worker safety

The HIRIDE<sup>+</sup> Hopper unit integrates a proprietary Minimum Pressure Drop (MPD) 175 nozzle and unique TriMix Diffuser (TMD) into an easily installed, rugged, stainless steel frame which has been designed to an optimal height for improved ergonomics.

The unit is available in two configurations: SE and EA. The HIRIDE Hopper unit's dynamic positioning design offers the unique ability to rotate the MPD/TMD eductor assembly up to 180°, creating unparalleled flexibility for new installs or retrofits on offshore or land rigs. The proprietary eductor design minimizes pressure loss, provides consistently higher vacuum, requires less energy, maintains a rapid rate of induction and reduces “fish eyes.” The ability to maintain high productivity under consistently low or variable circulating pump pressures makes the HIRIDE Hopper unit the leader in rapid mixing technology.

## Features

- The patented, combination Minimum Pressure Drop (MPD) 175 nozzle and TriMix Diffuser (TMD) are made of durable polyurethane
- 2,790 in.<sup>3</sup> (45.7 L) hopper (equal to a 100-lb [45.4-kg] sack of barite)
- Standard 2-in. (DN50) bulk-liquids induction port
- 4-in. (DN100) grove connect provides compatibility with liquid tanks
- Consistent 26.8-in (681-mm) Hg vacuum
- Lowest comparable pressure loss at 48 psi (3.3 bar)
- Lowest comparable energy requirement at 0.47 hp/gph (92 kW/m<sup>3</sup>/hr)
- 35 MT/hr rate of solids induction
- Grooved pipe connections for quick installation and removal
- Consistent mixing performance between 30 and 60 psi (2 and 4 bar)
- Durable, weather-resistant, stainless steel construction
- 600-GPM (136.2 m<sup>3</sup>/min) circulation can vacuum water through 33 ft (10 m) of 2-in. (DN50) hose and a vertical rise of 20 ft (6.1 m) at 80 GPM (302.8 L/min)

### Benefits


- Bulk solids induction without costly additional equipment
- Dynamic eductor allows rapid adjustment of eductor height and hopper orientation for customized installation onshore or offshore
- Smaller dimensions ensure suitability for all locations requiring minimal modifications to rig spaces or the unit itself
- Unique nozzle/diffuser design ensures mixing performance that is not affected by variable service pressure
- Combination of advanced MPD nozzle and TMD design ensure efficient entrainment of solids and elimination of “fish eyes” in less than 5 min, with hydrophobic polymers
- No spillage or hopper bridging
- Cleanouts are faster with no equipment disassembly required
- Cleaner work site reduces potential for slip and fall injuries
- More tank turnovers
- Two configurations available including:
  - Model 175 SE — Standard model with eductor piping fixed in position
  - Model 175 EA — An eductor-only option to be coupled with a dust-free system

### How It Works

The HIRIDE Hopper unit is an improved means of introducing liquid, powdered or granular additives into drilling, reservoir drill-in or completion fluids on the rig. The mixing hopper facilitates the manual addition of small volumes of material supplied in individual 50- or 100-lb (22- or 44-kg) sacks.

Fluids enter the unit via a 6-in. (DN150) line, and the MPD nozzle constricts the flow to a 1.75-in. (45-mm) orifice in the nozzle via a downstream, inwardly sloping conical shape. The flow exits the downstream side of the MPD nozzle at high velocity into a void space. The mixing hopper or other flowline opens into this void space via a manual butterfly valve. With the valve open, the high-velocity flow creates a zone of relative low pressure, which creates suction, drawing the material into the void space.

The powdered material drawn into the void space is then carried by the high-velocity flow into the mouth of the TMD diffuser where the geometry promotes turbulence and thus mixing. Flow moves through the throat of the diffuser into a secondary void space, which again changes velocity, creating more turbulence and recirculation zones. The flow then enters

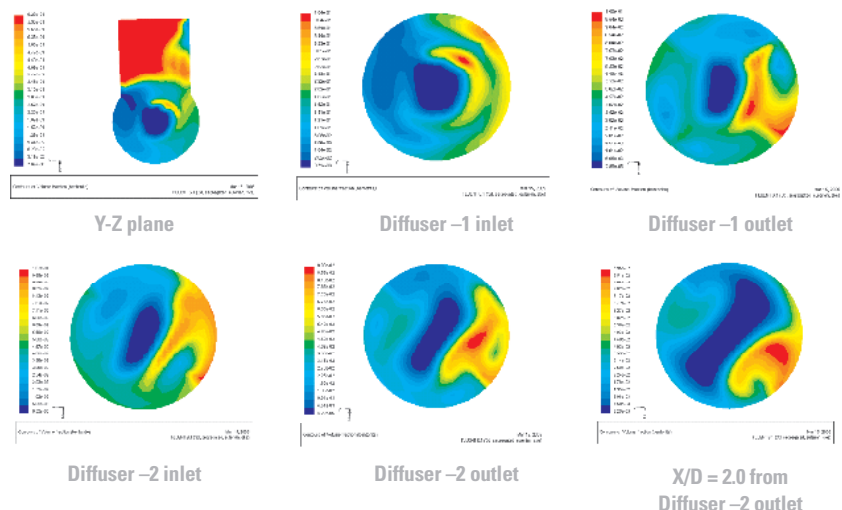

the second throat of the TMD and exits into the 6-in. (152-mm) pipe which again changes the flow velocity creating more recirculation and turbulence and further encouraging mixing. At this stage, all material is effectively entrained in the fluid.


There is also a 2-in. (DN50) angled port installed directly below the 4-in. (DN100) butterfly valve on the inlet to the eductor. This port is used for the addition of liquid products from drum, bulk tank or tanker. Liquids with a viscosity similar to water can be added at a rate of up to 108 GPM (410 L/min). Induction rates will vary depending on the temperature and viscosity of the fluid added.

### Specifications


	Length in. (mm)	Width in. (mm)	Height in. (mm)	PipeSpool Length (F-F) in. (mm)	Pipe Spool Elevation in. (mm)
HIRIDE Hopper	49 (1,244.6)	29.6 (751.8)	39.32 (998.2)	42.2 (1071.8)	Typical 8 (203.2), varies 3 (76.2) on 175 FE

- Table and hopper: 304/304L stainless steel plate ¼-in. (6.35-mm) thick
- Legs: 304/304L stainless steel
- Victaulic couplings: ASTM A395/A536 and 316 stainless
- Valves: ASTM A395/A536 and 316 stainless (ASTM A743)
- Piping: 316/316L stainless steel
- Standard: B31.3 ANSI/ASME Code for Pressure Piping — Chemical Plant and Refinery Piping
- Weights: Standard table 485 lb (220 kg)
  - Eductor only 162 lb (73.5 kg)


Engineering Drawing: HIRIDE Hopper

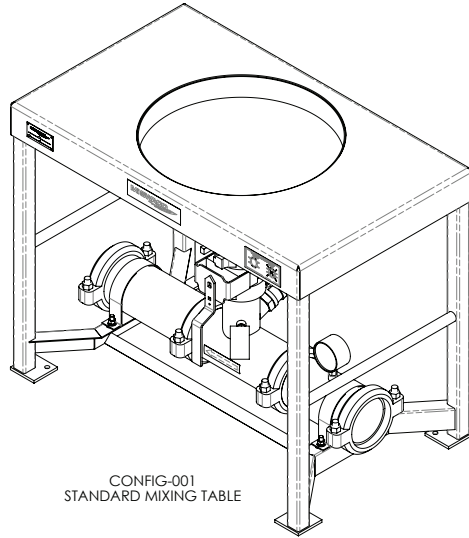

CONFIG-001  
STANDARD MIXING TABLE

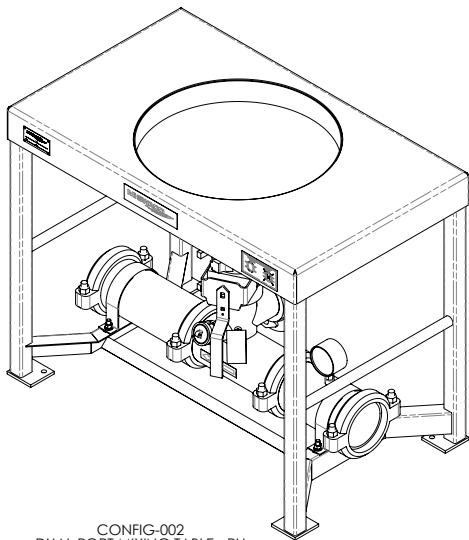

CONFIG-002  
DUAL PORT MIXING TABLE - RH

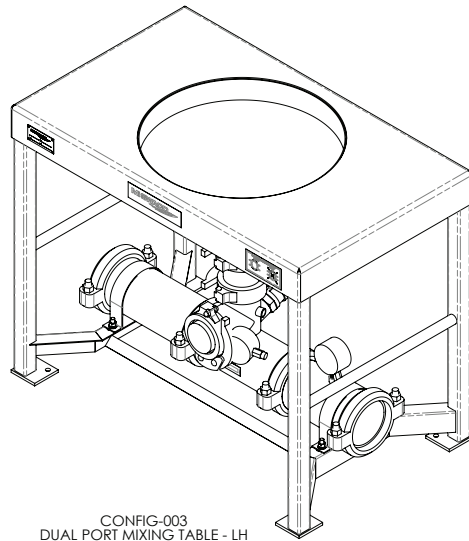

CONFIG-003  
DUAL PORT MIXING TABLE - LH

This information is supplied solely for informational purposes and M-I SWACO makes no guarantees or warranties, either expressed or implied, with respect to the accuracy and use of this data. All product warranties and guarantees shall be governed by the Standard Terms of Sale. Nothing in this document is legal advice or is a substitute for competent legal advice.